



OS1

Mid-Range High-Resolution Imaging Lidar

FIRMWARE VERSION: 3.1.x


HARDWARE VERSION: REV7

SUMMARY

The mid-range OS1 lidar sensor features 90 m range on a dark 10% target, a 42.4° vertical field of view, and high reliability for the most rugged conditions. The OS1 is designed for all-weather environments and use in industrial automation, autonomous vehicles, mapping, smart infrastructure, and robotics.

HIGHLIGHTS

- Configurable Minimum Range and Return Ordering
- Low Data Rate Profile now available with Dual Returns
- Camera-grade near-infrared and signal data
- Multi-sensor crosstalk suppression
- Ouster Studio for pointcloud evaluation
- Ouster SDK, ROS, and C++ drivers for SW development

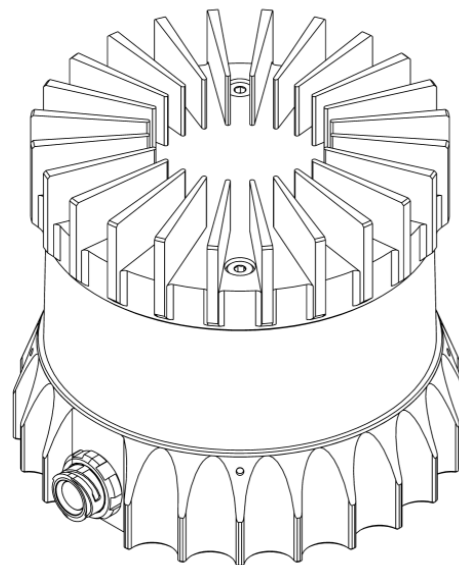

OPTICAL PERFORMANCE

Range (80% Lambertian reflectivity, 1024 @ 10 Hz mode)	170 m @ >90% detection probability, 100 klx sunlight
Range (10% Lambertian reflectivity, 1024 @ 10 Hz mode)	90 m @ >90% detection probability, 100 klx sunlight
Minimum Range	0.0 m (0.3 m optional, and 0.5 m default)
Vertical Resolution	32, 64, or 128 channels
Horizontal Resolution	512, 1024, or 2048 (configurable)
Rotation Rate	10 or 20 Hz (configurable)
Field of View	Vertical: 42.4° ± 1.0° (+21.2° to -21.2°) Horizontal: 360°
Angular Sampling Accuracy	Vertical: ±0.01° / Horizontal: ±0.01°
False Positive Rate	1/10,000
Range Resolution	0.1 cm Note: For <i>Low Data Rate Profile</i> the Range Resolution = 0.8 cm
# of Returns	up to 2
Return Order	Strongest to Weakest, Farthest to Nearest, and Nearest to Farthest

<p>Range Precision (Typical on Lambertian and Retroreflective targets beyond 1 m, 1024 @ 10 Hz mode, 1 standard deviation)</p> <p>Note: Precision is calculated based on the standard deviation of 100 measurements on a static target at a given range</p>	<p>Min: ±0.5 cm, Max: ±3 cm</p> <table border="1"><caption>Standard deviation (cm) vs Target distance (m)</caption><thead><tr><th>Target distance (m)</th><th>10% (dotted)</th><th>90% (dashed)</th><th>Retro (solid)</th></tr></thead><tbody><tr><td>0</td><td>0.5</td><td>0.5</td><td>2.0</td></tr><tr><td>10</td><td>0.6</td><td>0.5</td><td>2.0</td></tr><tr><td>20</td><td>0.7</td><td>0.5</td><td>2.0</td></tr><tr><td>30</td><td>0.8</td><td>0.5</td><td>2.0</td></tr><tr><td>40</td><td>1.0</td><td>0.5</td><td>2.0</td></tr><tr><td>50</td><td>1.2</td><td>0.6</td><td>2.0</td></tr><tr><td>60</td><td>1.5</td><td>0.7</td><td>2.0</td></tr><tr><td>70</td><td>1.9</td><td>0.7</td><td>2.0</td></tr><tr><td>80</td><td>2.4</td><td>0.7</td><td>2.0</td></tr><tr><td>90</td><td>3.0</td><td>0.8</td><td>2.0</td></tr></tbody></table>	Target distance (m)	10% (dotted)	90% (dashed)	Retro (solid)	0	0.5	0.5	2.0	10	0.6	0.5	2.0	20	0.7	0.5	2.0	30	0.8	0.5	2.0	40	1.0	0.5	2.0	50	1.2	0.6	2.0	60	1.5	0.7	2.0	70	1.9	0.7	2.0	80	2.4	0.7	2.0	90	3.0	0.8	2.0
Target distance (m)	10% (dotted)	90% (dashed)	Retro (solid)																																										
0	0.5	0.5	2.0																																										
10	0.6	0.5	2.0																																										
20	0.7	0.5	2.0																																										
30	0.8	0.5	2.0																																										
40	1.0	0.5	2.0																																										
50	1.2	0.6	2.0																																										
60	1.5	0.7	2.0																																										
70	1.9	0.7	2.0																																										
80	2.4	0.7	2.0																																										
90	3.0	0.8	2.0																																										
<p>Range Accuracy (Typical on Lambertian and Retroreflective targets beyond 1 m, 1024 @ 10 Hz mode)</p> <p>Note: Accuracy is calculated based on the error between the mean of 100 measurements on a static target at a given range and the true range</p>	<p>±2.5 cm for lambertian targets, ±5 cm for retroreflective targets</p> <table border="1"><caption>Mean Range Error (cm) vs Target distance (m)</caption><thead><tr><th>Target distance (m)</th><th>Lambertian (0.1 to 100% reflectivity) (dotted)</th><th>Retroreflector (solid)</th></tr></thead><tbody><tr><td>0</td><td>2.5</td><td>5.0</td></tr><tr><td>10</td><td>2.5</td><td>5.0</td></tr><tr><td>20</td><td>2.5</td><td>5.0</td></tr><tr><td>30</td><td>2.5</td><td>5.0</td></tr><tr><td>40</td><td>2.5</td><td>5.0</td></tr><tr><td>50</td><td>2.5</td><td>5.0</td></tr><tr><td>60</td><td>2.5</td><td>5.0</td></tr><tr><td>70</td><td>2.5</td><td>5.0</td></tr><tr><td>80</td><td>2.5</td><td>5.0</td></tr><tr><td>90</td><td>2.5</td><td>5.0</td></tr></tbody></table>	Target distance (m)	Lambertian (0.1 to 100% reflectivity) (dotted)	Retroreflector (solid)	0	2.5	5.0	10	2.5	5.0	20	2.5	5.0	30	2.5	5.0	40	2.5	5.0	50	2.5	5.0	60	2.5	5.0	70	2.5	5.0	80	2.5	5.0	90	2.5	5.0											
Target distance (m)	Lambertian (0.1 to 100% reflectivity) (dotted)	Retroreflector (solid)																																											
0	2.5	5.0																																											
10	2.5	5.0																																											
20	2.5	5.0																																											
30	2.5	5.0																																											
40	2.5	5.0																																											
50	2.5	5.0																																											
60	2.5	5.0																																											
70	2.5	5.0																																											
80	2.5	5.0																																											
90	2.5	5.0																																											

LASER

Laser Product Class	Class 1 eye-safe per IEC/EN 60825-1: 2014
Laser Wavelength	865 nm
Beam Diameter Exiting Sensor	9.5 mm
Beam Divergence	0.18° (FWHM)

LIDAR OUTPUT

Connection	UDP over gigabit Ethernet
Points Per Second	1,310,720 (32 channel) 2,621,440 (64 channel) 5,242,880 (128 channel)
Data Rate (megabits per second) (Low Data Rate Profile, 1 return, 1024 @ 10 Hz mode)	up to 11.83 Mbps (32 channel) up to 22.32 Mbps (64 channel) up to 43.29 Mbps (128 channel)
Data Rate (megabits per second) (Low Data Rate Profile, 2 returns, 1024 @ 10 Hz mode)	up to 22.32 Mbps (32 channel) up to 43.29 Mbps (64 channel) up to 85.24 Mbps (128 channel)

Data Rate (megabits per second) (Single Return Profile, 1024 @ 10 Hz mode)	up to 32.81 Mbps (32 channel) up to 64.26 Mbps (64 channel) up to 127.18 Mbps (128 channel)
Data Rate (megabits per second) (Dual Return Profile, 1024 @ 10 Hz mode)	up to 43.29 Mbps (32 channel) up to 85.24 Mbps (64 channel) up to 169.12 Mbps (128 channel)
Data Per Point	Range, Signal, Reflectivity, Near-infrared, Channel, Azimuth angle, and Timestamp
Timestamp Resolution	< 1 μ s
Data Latency	< 10 ms
Data Integrity	End to End CRC that covers entire data packet

IMU OUTPUT

Connection	UDP over 1000Base-T or 1000Base-T1
Samples Per Second	100
Data Per Sample	3 axis gyro, 3 axis accelerometer
Timestamp Resolution	< 1 μ s
Data Latency	< 10 ms
Additional Details	InvenSense IAM-20680HT; datasheet for more details: https://invensense.tdk.com/download-pdf/iam-20680ht-datasheet/

CONTROL INTERFACE




Connection	HTTP API	
Time Synchronization	Input sources: <ul style="list-style-type: none"> • IEEE1588 Precision Time Protocol (PTP); Accuracy: <1 ms error • gPTP; Accuracy: <1 ms error • NMEA \$GPRMC UART message support • External PPS; Accuracy: <1 ms error • Internal 10 ppm drift clock; Accuracy: <20 ppm error Output sources: <ul style="list-style-type: none"> • Configurable 1 - 60 Hz output pulse 	
Lidar Operating Modes	<ul style="list-style-type: none"> • x 512 @ 10 Hz or 20 Hz • x 1024 @ 10 Hz or 20 Hz • x 2048 @ 10 Hz 	
Additional Programmability	<ul style="list-style-type: none"> • Multi-sensor phase lock • Queryable intrinsic calibration information: <ul style="list-style-type: none"> • Beam angles • IMU pose correction matrix 	<ul style="list-style-type: none"> • Return ordering • Minimum range • Azimuth masking • Low-power standby mode

MECHANICAL/ELECTRICAL

Power Consumption	14 - 20 W <ul style="list-style-type: none"> • 16 W nominal • 28 W peak at startup if operating at -40 °C Note: Ouster recommends use of a power supply of no less than 30 W if using in cold conditions
Connector	Standard 1000BASE-T or Automotive Standard 1000BASE-T1
Operating Voltage	9.5 V - 51 V <ul style="list-style-type: none"> • Suitable for 12 VDC to 24 VDC nominal systems • Not suitable for 48 V nominal battery based systems • Under-voltage WARNING level alert occurs at 9.5 VDC at the connector • Under-voltage ERROR level alert occurs at 9.0 VDC at the connector • Below 9.0 VDC at connector, sensor may shutdown • Over-voltage conditions/alarms occur at 51 VDC at the connector • Over-voltage lockout onset at 58 VDC (± 1 V) at the connector • Over-voltage lockout release at 55 VDC (± 1 V) at the connector

Dimensions	Diameter: 87 mm (3.42 in) Height: <ul style="list-style-type: none"> • Without cap: 58.35 mm (2.3 in) • With thermal cap: 74.2 mm (2.9 in)
Weight	Without cap: 410 g (14.5 oz) With radial cap: 482 g (17.0 oz) With halo cap: 502 g (17.7 oz)
Mounting	Bottom: 4x M3 screws, 2x locating 2 mm pin holes Top: 4x M3 screws, 4x locating 2 mm pin holes, 1x M6 screw

OPERATIONAL

Operating Temperature	-40 °C to +60 °C (with mount) Between +53 °C and +60 °C, sensor automatically reduces range (max 20% range reduction)
Storage Temperature	-40 °C to +105 °C
Ingress Protection	IP68 (1 m submersion for 1 hour, with I/O cable attached) IP69K (with I/O cable attached)
Shock	IEC 60068-2-27 (Amplitude: 100 g, Shape: 11 ms half-sine, 3 shocks x 6 directions)
Vibration	IEC 60068-2-64 (Amplitude: 3 G-rms, Shape: 10 - 1000 Hz, Mounting: sprung masses, 3 axes w/ 8 hr duration each)
Compliance Note: Ouster UK (Ltd): 125 Princes Street, Edinburgh EH2 4AD, Scotland, United Kingdom Contact: Neil Calder, Phone Number: +44(0).131.563.9078	<p>For US</p> <p>Laser Safety:</p> <ul style="list-style-type: none"> • EN/IEC 60825-1:2014 Class 1 eye safe • FDA US 21CFR1040 Notice 56 Class 1 <p>Product Safety:</p> <ul style="list-style-type: none"> • UL 62368-1 • UL 60950-22 (outdoor use) • CSA-C22.2 No. 62368-1-19 • CSA-C22.2 No. 60950-22-07 (outdoor use) <p>EMC: FCC 47CFR Part 15, Subpart B, Class A</p> <p>For EU</p> <p>Laser Safety: EN/IEC 60825-1:2014 Class 1 eye safe</p> <p>Product Safety: EN/IEC 62368-1</p> <p>EMC:</p> <ul style="list-style-type: none"> • EN 55032:2012/AC 2013; CISPR 32:2015 • EN 55024:2010; CISPR 24:2010 • EN 61000-3-2:2014 • EN 61000-3-3:2013 <div>    </div>

ACCESSORIES

Interface Box	Polycarb/FR4, 100 g, 75 mm x 50 mm x 25 mm (LxWxH), 2 m CAT6 cable, 24 V power adapter, 5 m sensor cable
Mount	Aluminum, 530 g, 110 mm x 110 mm x 20.5 mm (LxWxH), 4 x M8 thru holes

SOFTWARE

Sample Drivers	Ouster SDK, ROS, C++
Visualizer	Ouster Studio

EXTERIOR DIMENSIONS

